



WEICON Solutions for the

# FOOD, PHARMACEUTICAL AND COSMETIC INDUSTRY



GET IT ON  
Google Play



Download on the  
App Store



[www.weicon.com](http://www.weicon.com)



# FOOD, PHARMACEUTICAL AND COSMETIC INDUSTRY

In sensitive areas, such as the production of food and beverages, the pharmaceutical industry and the production of cosmetics, strict hygiene standards and regulations apply.

That is why surfaces, machines and equipment in these areas of industry must be thoroughly and hygienically cleaned on a regular basis. Cleanliness and hygiene are also very important requirements when it comes to maintenance and repairs.

Only special products that meet the highest standards can be used on machines and systems in these sensitive areas.

WEICON offers various solutions for production, cleaning, maintenance, repair, and servicing in the fields of food production, the pharmaceutical industry and the production of cosmetic products.

A large number of WEICON products comply with the high hygiene standards in these areas and provide various safety certificates and approvals. Whether **NSF registrations**, **ISEGA certificates**, **WRAS approvals**, **DVGW approvals** or **BAM certificates** - our product range offers you the right products for your operational processes and applications.



## CONTENT

Content	Page
Technical Sprays and Liquids	4-7
Lubricants, Release Agents and Anti-Corrosion Agents	4-5
Cleaning Agents	6
Occupational Safety	7
1-Component Adhesives and Sealants	8
WEICONLOCK® Anaerobic Adhesives and Sealants	8-11
Cyanoacrylate Adhesives Contact	12-13
Elastic Adhesives and Sealants	14-17
Plastic Metal	18
Pipe Repair-Kit	18
Repair Sticks	19
Lubricants	20
Assembly Pastes	21
Food Certifications	22-23



Simply find solutions  
with our  
**WEICON APP**





# TECHNICAL SPRAYS AND LIQUIDS

## Lubricants, Release Agents and Anti-Corrosion Agents

### Silicon-Fluid

excellent sliding and separating effect | temperature resistance from -30°C to +250°C | NSF-H1 registration

► 400 ml  
10009519

Video



### Bio-Fluid

high lubricating effect and good capillary action | high-purity medical white oil | NSF-H1 registration

► 200 ml 10027448    ► 500 ml 10000158    ► 5 L 10000365

### Zinc Spray

long-term cathodic corrosion protection | paintable | >1050 in the salt spray test according to DIN EN ISO 9227 | NSF approval

► 400 ml  
10000016



### Rust Loosener-Fluid

penetrates into the smallest cavities | secures the function of mechanical parts and electrical contacts | protects against corrosion and oxidation

► 400 ml  
10039111

### W 44 T®-Fluid

resin and acid-free | excellent penetration properties | lubrication, water displacement, corrosion protection, cleaning and conservation in one product

► 400 ml  
10039113

### Spray-on Grease H1

white grease, high-temperature-resistant | odour- and tasteless | NSF-H1 registration

► 400 ml  
10021359

### Anti-Seize Assembly Spray High-Tech

white assembly paste | metal-free | NSF-H1 registration

► 400 ml  
10000221

## our Double Nozzle attachment



10044969

Multifunctional spray head for exact dosage in areas difficult to access

# NSF®

With our selection of food-grade technical sprays and liquids, we ensure that you get the right products for your production, maintenance and repair processes, which meet your requirements in terms of both quality and safety. We have developed a wide range of special products for a large variety of applications that meet the high standards of NSF International.

These products can be used in sensitive areas, such as food production facilities, the food and beverage industry as well as in the pharmaceutical and cosmetics industries.

for sensitive areas



### PTFE-Fluid

repels dirt, dust and water | resistant against oils, greases and many chemicals | NSF-H2 registration

► 400 ml  
10039115

Video



### Top-Lube-Fluid

particularly adherent and pressure-resistant | noise-damping and water-repellent | prevents elongation, friction and wear

► 400 ml  
10039117

### Stainless Steel Care A7 NEW

cleaning, protection and care of brushed, matt and polished stainless steel surfaces in sensitive areas

► 400 ml  
10060669





for sensitive areas

# TECHNICAL SPRAYS AND LIQUIDS

## Cleaning Agents

### Fast Cleaner



pH-neutral and material-compatible | can be used on many different materials such as metals, glass, ceramics and most rubbers and plastics | NSF-A1 registration

► 500 ml 10039119  
► 5 L 10047373

### Industrial Cleaner



powerful special cleaner with high yield | ingredient content of 95 %

► 500 ml 10055297

### Foam Cleaner



for the food industry | universally applicable | NSF A1 registration

► 400 ml 10050556

Video



### Metal-Fluid

for matt and polished surfaces | for stainless steel, ceramics, glass, plastics, wood | NSF-A7; C1 registration

► 400 ml 10016338  
► 5 L 10016345

### Universal Spatula white

10039185



Special spatula for the gentle removal of the most diverse contamination and residues. Suitable for use in the food industry.


EU Regulation 10/2011/EC plastics with food contact.

Video



## Occupational Safety

### Citrus Cleaner



cleans various materials\* | supports the disinfecting effect | evaporates without residue

► 400 ml 10032019

\* The material compatibility should be checked beforehand on an unseen surface area.




### Hand Protective Foam

grease-free and waterproof protective film | "invisible glove"

► 200 ml 10021320

Typical applications  
in the food industry

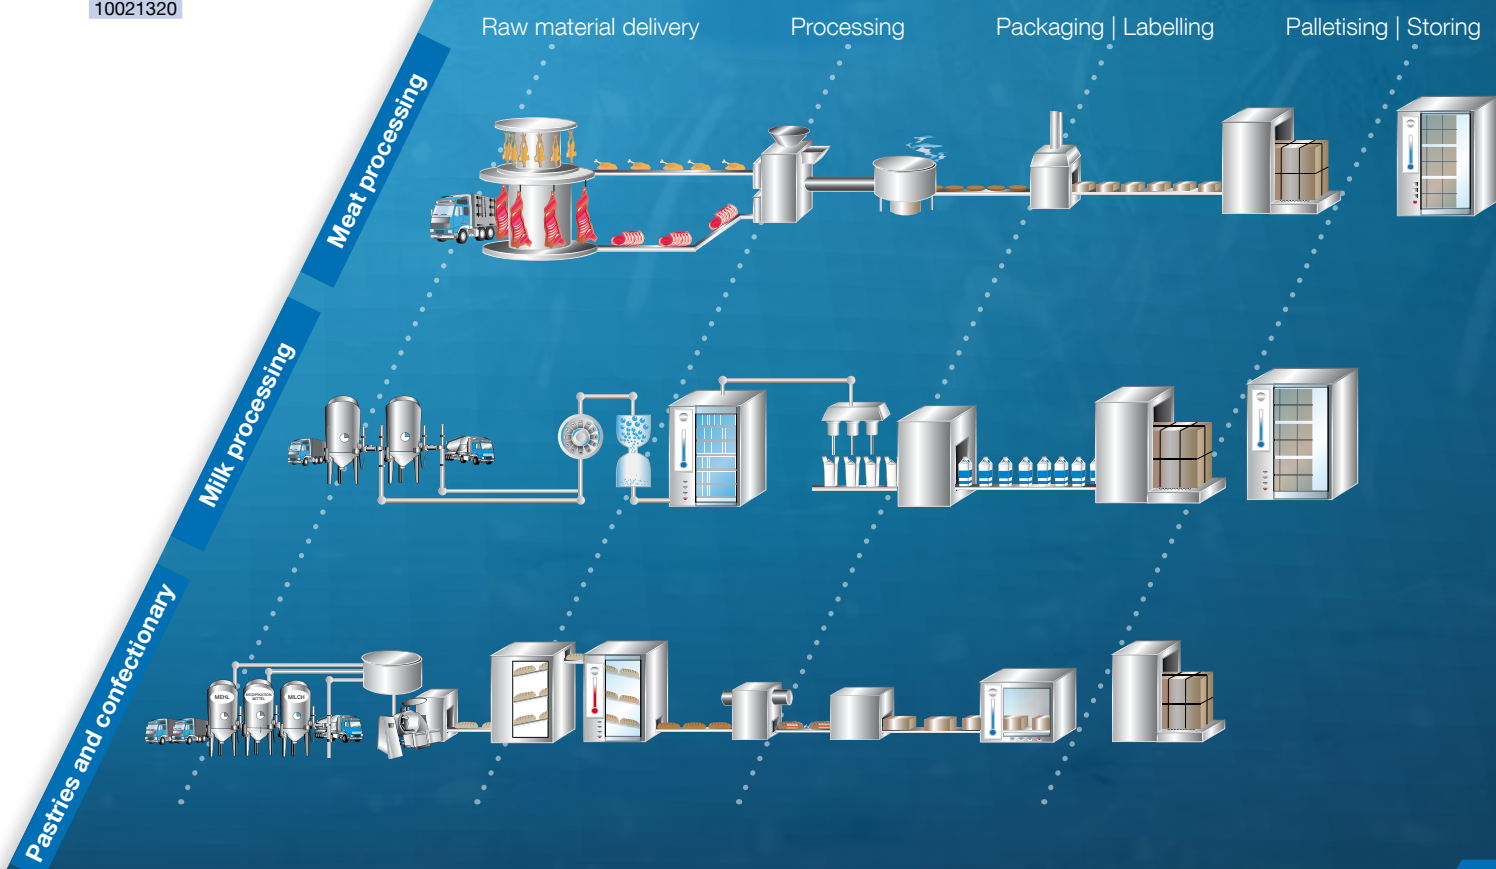



## 1-COMPONENT ADHESIVES AND SEALANTS

## WEICONLOCK®

## THREADLOCKING

AN 301-43

NSF

Certified to NSF/ANSI 61



Threadlocking | classified as non-hazardous | drinking water approval and DVGW approval

- ▶ higher viscosity
- ▶ medium strength
- ▶ disassembly with normal tools

▶ 20 ml ▶ 50 ml ▶ 200 ml  
10026819 10026814 10026817

AN 301-70

NSF

Certified to NSF/ANSI 61

Threadlocking | classified as non-hazardous | drinking water approval

- ▶ medium viscosity
- ▶ high strength
- ▶ hard to disassemble

▶ 20 ml ▶ 50 ml ▶ 200 ml  
10026829 10026826 10026827



AN 302-42



Threadlocking | drinking water approval

- ▶ medium viscosity
- ▶ medium strength
- ▶ disassembly with normal tools

▶ 20 ml ▶ 50 ml ▶ 200 ml  
10017324 10017874 10019966

AN 302-43



Threadlocking | DVGW and drinking water approval

- ▶ higher viscosity
- ▶ medium strength
- ▶ disassembly with normal tools

▶ 10 ml ▶ 20 ml ▶ 50 ml ▶ 200 ml  
10030474 10016419 10017876 10019968

AN 302-44



Threadlocking for passive materials\*\* | DVGW and drinking water approval

- ▶ higher viscosity
- ▶ medium strength
- ▶ disassembly with normal tools

▶ 20 ml ▶ 50 ml ▶ 200 ml  
10037361 10037167 10037363



Especially designed for economical threadlocking, retaining and sealing of threaded, cylindrical and pipe assemblies. After curing, the adhesive bonding is resistant to vibration, impact, chemicals, solvents and temperatures.

AN 302-60



Threadlocking for passive materials\*\* | drinking water approval | fast curing

- ▶ medium viscosity
- ▶ high strength
- ▶ hard to disassemble

▶ 20 ml ▶ 50 ml ▶ 200 ml  
10016436 10017878 10019974

AN 302-70



Locking of threads and stud bolts | drinking water and DVGW approval

- ▶ medium viscosity
- ▶ high strength
- ▶ hard to disassemble

▶ 10 ml ▶ 20 ml ▶ 50 ml ▶ 200 ml  
10030476 10016421 10017884 10019978

AN 302-72



Locking of threads and stud bolts | high-temperature-resistant | DVGW- and drinking water approval

- ▶ higher viscosity
- ▶ high strength
- ▶ hard to disassemble

▶ 20 ml ▶ 50 ml ▶ 200 ml  
10019901 10017889 10019982



\*\* Passive materials:  
(slow curing)

- ▶ high-alloyed steel
- ▶ oxide layers
- ▶ anodic coatings

- ▶ aluminium, nickel, zinc, gold
- ▶ chromate layers
- ▶ plastics and ceramics



## SEALING OF THREADED PIPES AND FITTINGS

AN 301-65

NSF

Certified to NSF/ANSI 61

Pipe and flange sealing with PTFE | classified as non-hazardous | drinking water approval

- ▶ high viscosity
- ▶ medium strength
- ▶ disassembly with normal tools

▶ 50 ml ▶ 200 ml ▶ 300 ml  
10031782 10031783 10034139

AN 301-72

NSF

Certified to NSF/ANSI 61



Pipe and flange sealing with PTFE | classified as non-hazardous | high-temperature-resistant | drinking water and DVGW approval

- ▶ higher viscosity
- ▶ medium strength
- ▶ disassembly with normal tools

▶ 50 ml ▶ 200 ml ▶ 300 ml  
10026836 10026840 10047470

AN 302-80



Pipe and thread sealing for passive materials\*\* | drinking water approval

- ▶ higher viscosity
- ▶ high strength
- ▶ hard to disassemble

▶ 20 ml ▶ 50 ml ▶ 200 ml  
10019903 10017875 10019991



SI 303-31

NSF

Certified to NSF/ANSI 61



Pipe and thread sealing | ISEGA-certified | drinking water approval | NSF approval

- ▶ high viscosity
- ▶ low strength
- ▶ easy disassembly

▶ 85 ml  
10050555  
Tube



\*\* Passive materials:  
(slow curing)

- ▶ high-alloyed steel
- ▶ oxide layers
- ▶ anodic coatings

- ▶ aluminium, nickel, zinc, gold
- ▶ chromate layers
- ▶ plastics and ceramics

\* BAM tested and safety-related evaluated  
- according to leaflet M 031-1 "List of nonmetallic materials compatible with oxygen" (DGV information 213-078) of BG RCI

AN 305-11



Pipe and thread sealing | DVGW and drinking water approval

- ▶ higher viscosity
- ▶ medium strength
- ▶ disassembly with normal tools

▶ 50 ml ▶ 200 ml ▶ 300 ml  
10019939 10019997 10023823

AN 305-72



Pipe and flange sealing (with PTFE) immediate sealing effect | drinking water and DVGW approval

- ▶ high viscosity
- ▶ medium strength
- ▶ disassembly with normal tools

▶ 50 ml ▶ 200 ml ▶ 300 ml  
10019943 10020003 10026707


AN 305-77



Thread sealing | drinking water and DVGW approval | BAM\*

- ▶ high viscosity
- ▶ medium strength
- ▶ disassembly with normal tools

▶ 50 ml ▶ 200 ml ▶ 300 ml  
10019949 10020011 10034148



AN 305-78



Pipe and thread sealing for passive materials\*\* | drinking water and DVGW approval | BAM\*

- ▶ high viscosity
- ▶ medium strength
- ▶ disassembly with normal tools

▶ 50 ml ▶ 200 ml  
10037168 10037366



## Thread Sealing Cord DF 175

- ▶ immediate sealing effect, temperature resistance from -200°C to +240°C
- ▶ drinking water approvals according to KTW, WRAS
- ▶ UL-Tested
- ▶ 100% solid PTFE, silicone-free
- ▶ tested up to 45° reverse rotation
- ▶ resistant to nearly all chemicals, oils and gases

▶ plastic can 175 ml  
10026655





# WEICON LOCK®

## FLANGE SEALING, GASKETING

### AN 301-65



Pipe and flange sealing with PTFE | classified as non-hazardous | drinking water approval

- ▶ drinking water approval
- ▶ medium strength
- ▶ disassembly with normal tools

▶ 50 ml    ▶ 200 ml    ▶ 300 ml  
10031782    10031783    10034139

### AN 305-72



Pipe and flange sealing (with PTFE) | immediate sealing effect | drinking water and DVGW approval

- ▶ high viscosity
- ▶ medium strength
- ▶ disassembly with normal tools

▶ 50 ml    ▶ 200 ml    ▶ 300 ml  
10019943    10020003    10026707

### AN 301-72



Pipe and flange sealing with PTFE | classified as non-hazardous | high-temperature-resistant | drinking water and DVGW approval

- ▶ higher viscosity
- ▶ medium strength
- ▶ disassembly with normal tools

▶ 50 ml    ▶ 200 ml    ▶ 300 ml  
10026836    10026840    10047470



### AN 306-20



Retaining cylindrical assemblies | high-temperature-resistant | drinking water and DVGW approval | BAM\*

- ▶ higher viscosity
- ▶ high strength
- ▶ hard to disassemble

▶ 20 ml    ▶ 50 ml    ▶ 200 ml  
10017330    10017885    10020023

## RETAINING CYLINDRICAL ASSEMBLIES

### AN 301-38



Retaining cylindrical assemblies for bearings, shafts and bushings | drinking water approval

- ▶ medium viscosity
- ▶ high strength
- ▶ hard to disassemble

▶ 20 ml    ▶ 50 ml    ▶ 200 ml  
10026852    10026846    10026847

### AN 301-48



Retaining cylindrical assemblies for bearings, shafts and bushings | high-temperature-resistant | drinking water and DVGW approval

- ▶ medium viscosity
- ▶ high strength
- ▶ hard to disassemble

▶ 20 ml    ▶ 50 ml    ▶ 200 ml  
10026859    10026856    10026857

### AN 306-10



Retaining cylindrical assemblies for passive materials\*\* | drinking water approval

- ▶ medium viscosity
- ▶ high strength
- ▶ hard to disassemble

▶ 20 ml    ▶ 50 ml    ▶ 200 ml  
10019911    10017883    10020021

\*\* Passive materials: ▶ high-alloyed steel    ▶ aluminium, nickel, zinc, gold  
(slow curing)    ▶ oxide layers    ▶ chromate layers  
                                  ▶ anodic coatings    ▶ plastics and ceramics

### AN 306-30



Retaining cylindrical assemblies for passive materials\*\* | BAM\* | drinking water approval

- ▶ higher viscosity
- ▶ high strength
- ▶ hard to disassemble

▶ 20 ml    ▶ 50 ml    ▶ 200 ml  
10016438    10017887    10020025

### AN 306-38



Retaining cylindrical assemblies for bearings, gear wheels and bolts | fast cure | drinking water approval

- ▶ medium viscosity
- ▶ high strength
- ▶ hard to disassemble

▶ 10 ml    ▶ 20 ml    ▶ 50 ml    ▶ 200 ml  
10030478    10016443    10017888    10020027

### AN 306-48



Retaining cylindrical assemblies | high-temperature-resistant | drinking water approval | BAM\*

- ▶ medium viscosity
- ▶ high strength
- ▶ hard to disassemble

▶ 20 ml    ▶ 50 ml    ▶ 200 ml  
10016442    10017893    10020035

\* BAM tested and safety-related evaluated  
- according to leaflet M 031-1 "List of nonmetallic materials compatible with oxygen" (DVGW information 213-078) of BG RCI





1-COMPONENT ADHESIVES AND SEALANTS

# CYANOACRYLATE ADHESIVES

WEICON **Cyanoacrylate Adhesives** are cold-curing 1-component adhesives, free of solvents.

They bond within seconds almost all materials to and among each other, such as metals, glass, wood, plastics, ceramics, leather and rubber.

VA 20



Cyanoacrylate Adhesives for rubber and plastics | low viscosity | very fast curing | ISEGA-certified

► 12 g 10018860    ► 30 g 10016618    ► 60 g 10019781    ► 500 g 10000215

VA 100



Cyanoacrylate Adhesive for rubber and plastics | medium viscosity | slightly longer curing

► 12 g 10018867    ► 30 g 10016433    ► 60 g 10019785    ► 500 g 10000226

## Contact Activator

► 150 ml  
10000282  
CA-Activator  
Spray



► 150 ml  
10033805  
CA-Activator Spray AC  
(based on acetone)



VA 110



Certified to  
NSF/ANSI 61

Cyanoacrylate Adhesive for special requirements | medium viscosity | longer curing | drinking water approval

► 12 g 10033861    ► 30 g 10031926    ► 60 g 10033865    ► 500 g 10031927

VA 1401



Nonfood Compounds  
Program Listed 84  
Registration 162659

Cyanoacrylate Adhesive for rubber and plastics | medium viscosity | fast curing | NSF approval

► 12 g 10018869    ► 30 g 10016402    ► 60 g 10019787    ► 500 g 10001557



VA 8312



Cyanoacrylate Adhesive for rubber and plastics | low viscosity | very fast curing | ISEGA-certified

► 12 g 10018863    ► 30 g 10016432    ► 60 g 10019793    ► 500 g 10000242

VA 8406



Cyanoacrylate Adhesive for rubber and plastics | ISEGA-certified | low viscosity | very fast curing

► 12 g 10018865    ► 30 g 10016396    ► 60 g 10019794    ► 500 g 10001559





# ELASTIC ADHESIVES AND SEALANTS


Today, **elastic adhesives and sealants** are used in many areas of industrial production and assembly. They combine the advantages of adhesive bonding and sealing technology and are used wherever the elasticity and the sealing of a joint are the most important requirements.



Bonding and sealing a glass cover (olive processing machine)  
Flex 310 M® Classic



## INNOVATION



### Ergo Connect for Presspack **NEW**

Ergonomic dosing tip for WEICON Presspack products.

- ▶ ergonomic handling
- ▶ 180° application thanks to two-way thread
- ▶ ideal angle for perfect applications
- ▶ safe and flexible cap can be locked
- ▶ compatible with WEICON dosing tip and brush top

### Flex 310 M® Classic



Suitable for universal use | ISEGA-certified

- |                                   |                                   |                                   |
|-----------------------------------|-----------------------------------|-----------------------------------|
| ▶ 200 ml<br>10057238<br>Presspack | ▶ 200 ml<br>10057240<br>Presspack | ▶ 200 ml<br>10057245<br>Presspack |
| ▶ 310 ml<br>10002576<br>white     | ▶ 310 ml<br>10010026<br>grey      | ▶ 310 ml<br>10010024<br>black     |

### Flex 310 M® Crystal



Crystal-clear curing | ISEGA-certified

- |                                   |                                   |
|-----------------------------------|-----------------------------------|
| ▶ 310 ml<br>10033740<br>Cartridge | ▶ 200 ml<br>10057247<br>Presspack |
|-----------------------------------|-----------------------------------|

### Flex 310 M® Liquid



Liquid | self-levelling | ISEGA-certified

- |                               |
|-------------------------------|
| ▶ 310 ml<br>10039625<br>white |
|-------------------------------|

### Flex 310 M® Liquid black **NEW**



Liquid | self-levelling | ISEGA-certified

- |                               |
|-------------------------------|
| ▶ 310 ml<br>10057733<br>black |
|-------------------------------|

### Flex 310 M® Stainless-Steel



For stainless steel, aluminium and non-ferrous metals | ISEGA-certified

- |                      |
|----------------------|
| ▶ 310 ml<br>10049091 |
|----------------------|





# ELASTIC ADHESIVES AND SEALANTS



## Silicone LP



NSF  
Nonfood Compounds  
Program Listed S2  
Registration 158693

Acetoxy curing |  
drinking water approval

► 310 ml ► 310 ml  
10053997 10060604  
white transparent

Tested by the "Hygiene-Institut des  
Ruhregebiets" in accordance with  
the KTW guideline of the Federal  
Environment Agency of Germany.



## Speed-Flex®



Replaces traditional fixings |  
ISEGA-certified

► 310 ml ► 310 ml  
10019651 10019653  
white grey



## Windscreen Adhesive



Elastic 1-C adhesive and sealant  
for mounting glass and window  
panes | ISEGA-certified

► 200 ml ► 310 ml  
10058069 10058067  
Presspack Cartridge



## Speed-Flex® Crystal



Crystal-clear adhesion |  
ISEGA-certified

► 310 ml  
10039109  
transparent



## Flex 310 PU



Adhesive and sealant based on PU |  
strong | permanently elastic |  
ISEGA-certified

► 300 ml ► 300 ml ► 300 ml  
10004287 10002571 10002573  
white black grey



## Flex+bond®



Highly elastic | strong | ISEGA-certified

► 85 ml ► 85 ml ► 85 ml  
10012994 10014356 10018364  
white black transparent



## ProSeal NEW



Multi-purpose, permanently elastic,  
fastcuring and high-strength 1-C  
adhesive and sealant based on SMP

► 310 ml  
10060643  
grey

Tested and approved for applications in food-related  
areas and for ventilation and air-conditioning  
systems in accordance with VDI 6022.




## Aqua-Flex



Ideal for wet and moist surfaces |  
ISEGA-certified

► 310 ml ► 310 ml ► 310 ml  
10021673 10021678 10021677  
white grey black



Looking for a  
dispensing gun?  
Get in touch with us!





# PLASTIC METAL



## WEICON GL-S NEW

Flowable | mineral-filled | wear protection | control layer | temperature-resistant up to +180 °C

The epoxy resin system WEICON GL-S provides high abrasion resistance and serves as wear protection for heavily used surfaces. It is flowable, spreadable (can be applied with a paint brush), has a high initial strength, is mineral-filled, and resistant to chemicals. WEICON GL-S is also well-suited for creating a system structure in combination with WEICON Ceramic BL.

► 0,2 kg 10060361  
► 0,5 kg 10060362  
► 2,0 kg 10060363

IN COMBINATION WITH WEICON CERAMIC BL

**PERFECT AS CONTROL LAYER**



## WEICON Ceramic BL

Flowable | mineral-filled | extremely wear-resistant | temperature-resistant up to +180 °C

WEICON Ceramic BL is filled with silicium carbide and zirconium silicate, resistant to chemicals and offers extreme wear protection as well as high abrasion resistance. The epoxy resin system is particularly suitable for lining heavily stressed pump casings, as wear protection for slide bearings, chutes, funnels and pipes, and for the repair of castings, valves and fan blades. The product can be used in mechanical and plant engineering, apparatus engineering and many other areas of industry. Wear-resistant top coating for all plastic metal types.

► 0,2 kg 10054394  
► 0,5 kg 10000093  
► 2,0 kg 10005233



# PIPE REPAIR KIT

The Repair-Kit can be used in various areas of industry for the quick and easy repair of chemical, steam, process and water pipes.

**5/15** ► 5 cm x 1,5 m 10055737  
**5/35** ► 5 cm x 3,5 m 10055738  
**10/35** ► 10 cm x 3,5 m 10055740  
**12/100** ► 12 cm x 10 m 10057026

The set includes  
WEICON Repair Stick Multi  
fibreglass-reinforced plastic  
repair tape  
assembly instructions  
protective gloves



Video

# REPAIR STICKS



The easy solution for all repair and maintenance work

## Repair Stick Multi-Purpose



Certified to NSF/ANSI 61 Facility #1 USA

schnellhärtend | mineralisch  
gefüllt | Trinkwasserzulassung

► 57 g 10053992  
► 115 g 10053995

## Repair Stick Steel



Certified to NSF/ANSI 61

fast-curing | steel-filled |  
drinking water approval

► 57 g 10010241  
► 115 g 10007705

## Repair Stick Copper



Certified to NSF/ANSI 61

extremely fast-curing | copper-filled |  
drinking water approval

► 57 g 10010227  
► 115 g 10006609

## Repair Stick Plastic



Certified to NSF/ANSI 61

plastic-filled |  
drinking water approval

► 57 g 10017301  
► 115 g 10017334

## Repair Stick Stainless Steel



Certified to NSF/ANSI 61

non-corrosive | fast-curing |  
stainless steel-filled | drinking water approval

► 57 g 10025658  
► 115 g 10025663





NSF

for sensitive areas

## LUBRICANTS

NSF

AL-H

High-temperature-resistant |  
odourless and tasteless

- ▶ 400 g 10016761
- ▶ 1,0 kg 10016763
- ▶ 5,0 kg 10016766
- ▶ 25,0 kg 10016769

NSF

AL-F

Allround product |  
NSF approval

- ▶ 350 g 10017515
- ▶ 400 g 10016775
- ▶ 1,0 kg 10016777
- ▶ 5,0 kg 10016781
- ▶ 25,0 kg 10016784

NSF

Silicone Grease

Special lubricant for valves,  
fittings and sealings | drinking  
water approval\* | BAM\*\*

- ▶ 85 g 10050566
- ▶ 400 g 10052326
- ▶ 450 g 10050558
- ▶ 1,0 kg 10050563
- ▶ 5,0 kg 10051113
- ▶ 25,0 kg 10051118

\*Tested by the Ruhr Region Institute of Hygiene  
 („Hygiene- Institut des Ruhrgebiets“) according to  
 the Hygienic Assessment of Lubricants in Contact  
 with Drinking Water by the Federal Environmental  
 Agency of Germany.

\*\*BAM tested and safety-related evaluated according  
 to leaflet M 031-1 “List of nonmetallic materials  
 compatible with oxygen”  
 (DGUV information 213-078) of BG RCI



Video



Assembly Pastes

## ANTI SEIZE

for highly stressed parts  
even in high temperature applicationstemperature resistance  
-40°C to +1.400°C  
metal-free

WEICON Anti Seize “High-Tech” is high-temperature-resistant,  
has an exceptionally good release effect, is metal-free,  
material-neutral and has an NSF registration.

Anti Seize “High-Tech” is especially suitable when metal-  
containing pastes can cause electrolytic reactions,  
nickel-containing products should or may not be used for health  
reasons, and dark products are unsuitable for optical reasons.

## Anti-Seize High-Tech

- ▶ white assembly paste
- ▶ metal-free
- ▶ NSF-H1 registration

NSF

Nonfood Compounds  
Program Listed H1  
Registration 141636

- ▶ 400 ml 10000221 Spray
- ▶ 120 g 10000193 Brush top can
- ▶ 450 g 10000196 Can
- ▶ 500 g 10030351 Brush top can
- ▶ 1000 g 10000197 Can







































NSF®

FOOD  
CERTIFICATIONS

With our selection of chemo-technical products with food certifications, we ensure that you get the right products for your production, maintenance and repair processes which meet your exact requirements quality- and safety-wise.

Allround Lubricant AL-F	Food area, classification code: H2, Registration No. 136173	
Allround Lubricant AL-H	Food area, classification code: H1, Registration No. 136174	
Anti-Seize High-Tech	Food area, classification code: H1, Registration No. 141636	
Aqua-Flex	Certificate of Conformity as an adhesive in food technology	
Bio-Fluid	Food area, classification code: H1, Registration No. (Spray), 136172 (Liquid)	
Contact Activator	Food area, classification code: P1, Registration No. 155051	
Contact Activator AC	Food area, classification code: P1, Registration No. 155052	
Contact-Cyanoacrylate Adhesive VA 20	Certificate of Conformity as an adhesive in food technology	
Contact-Cyanoacrylate Adhesive VA 100	Certificate of Conformity as an adhesive in food technology	
Contact-Cyanoacrylate Adhesive VA 110	NSF drinking water certificate ANSI Standard 61	
Contact-Cyanoacrylate Adhesive VA 1401	Food area, classification code: S4, Registration No. 162959	
Contact-Cyanoacrylate Adhesive VA 8312	Certificate of Conformity as an adhesive in food technology	
Contact-Cyanoacrylate Adhesive VA 8406	Certificate of Conformity as an adhesive in food technology	
Stainless Steel Care A7	Food area, classification code: A7, Registration No. 165294	
Flex 310 M®	Certificate of Conformity as an adhesive in food technology	
Flex+bond®	Certificate of Conformity as an adhesive in food technology	
Flex+bond® Liquid	Certificate of Conformity as an adhesive in food technology	
Flex 310 PU	Certificate of Conformity as an adhesive in food technology	
Thread Sealing Cord DF 175	TZW   WRAS  	
Industrial Cleaner	Food area, classification code: K1 K3, Registration No. 161996	
Metal-Fluid	Food area, classification code: A7;C1, Registration No. 135124 (Spray), 135125 (Liquid)	
Plastik-Stahl Keramik BL	Certificate of Conformity as an adhesive in food technology	
ProSeal	Certificate of Conformity as an adhesive in food technology	
PTFE-Fluid	Food area, classification code: H2, Registration No. 152620	
Repair Sticks	NSF drinking water certificate ANSI Standard 61	
Stainless Steel   Plastic   Copper   Steel Multi-Purpose	NSF drinking water certificate ANSI Standard 61 Facility #1 USA	
Rust Loosener-Fluid	Food area, classification code: H1, Registration No. 152621	
Foam Cleaner	Food area, classification code: A1, Registration No. 157612	
Windscreen Adhesive	Certificate of Conformity as an adhesive in food technology	
Fast Cleaner	Food area, classification code: A1, Registration No. 156578	
Silicone Grease	Food area, classification code: H1, Registration No. 164208   drinking water certificate: Tested by the Ruhr Region Institute of Hygiene	
Silicone-Fluid	Food area, classification code: H1, Registration No. 150726	
Silicone LP	Food area, classification code: S2, Registration No. 158659   drinking water certificate: Tested by the Ruhr Region Institute of Hygiene	

## Adhesives

NSF/ANSI Standard	Clearance certificate for the direct use in the potable water and food industry according to NSF/ANSI (Standard 61)	Repair Sticks Copper   Steel   Plastic   Stainless Steel   Multi-Purpose (Facility #1 USA) Contact VA 110 WEICONLOCK AN 301-38   AN 301-43   AN 301-48   AN 301-65   AN 301-70   AN 301-72
61		
S4	Adhesives exclusively for areas where direct or indirect contact with food can be ruled out.	Contact VA 1401
S2	Sealants exclusively for areas where direct or indirect contact with food can be ruled out.	WEICONLOCK SI 303-31   WEICONLOCK AN 305-77   Silicone LP

## Lubricants, Release Agents and Anti-Corrosion Agents


































H1	Lubricant with incidental food contact for use in and around food processing areas.	Anti-Seize High-Tech   Bio-Fluid (Spray, Liquid)   Silicone-Fluid   Spray-on Grease H1   Rust Loosener-Fluid   W 44 T®-Fluid   Allround-Lubricant AL-H   Silicone Grease
H2	Lubricant where there is no possibility of food contact in and around food processing areas.	PTFE-Fluid   Top-Lube-Fluid   Allround-Lubricant AL-F

## Cleaning Agents

A1	General cleaner for surfaces in and around food processing areas, where its use is not intended for direct food contact. A potable water rinse of cleaned surfaces is required after use of this product.	WEICON Fast Cleaner (Spray, Liquid)   WEICON Foam Cleaner
A7	Metal cleaner and polisher for nonfood contact surfaces in and around food processing areas. Odors associated with the compound must be dissipated before food products or packaging materials are re-exposed in the area.	WEICON Metal-Fluid (Spray, Liquid)   WEICON Stainless Steel Care A7
C1	Cleaner for use in inedible product processing areas. Treated equipment that will be returned to a food processing area must be completely washed off and rinsed with potable water.	WEICON Metal-Fluid (Liquid)
K1   K3	Solvent-based cleaners and degreasers for use in non-food processing areas. Solvent-based adhesive removers without direct food contact.	WEICON Industrial Cleaner

## Other

P1	Not suitable for direct or indirect contact to food	WEICON CA-Activator Spray   WEICON CA-Activator Spray AC (based on acetone)
R2	Coatings for use on structural surfaces that do not come into contact with food. The product must be applied in a way that prevents direct or indirect contamination of food.	Zinc Spray   Zinc Spray bright grade

Speed-Flex®	Certificate of Conformity as an adhesive in food technology	
Speed-Flex® Crystal	Certificate of Conformity as an adhesive in food technology	
Spray-On Grease H1	Food area, classification code: H1, Registration No. 140651	
Top-Lube-Fluid	Food area, classification code: H2, Registration No. 152617	
W 44 T®-Fluid	Food area, classification code: H1, Registration No. 152619	
WEICONLOCK® AN 301-38	NSF drinking water certificate ANSI Standard 61	
WEICONLOCK® AN 301-43	NSF drinking water certificate ANSI Standard 61	
WEICONLOCK® AN 301-48	NSF drinking water certificate ANSI Standard 61	
WEICONLOCK® AN 301-65	NSF drinking water certificate ANSI Standard 61	
WEICONLOCK® AN 301-70	NSF drinking water certificate ANSI Standard 61	
WEICONLOCK® AN 301-72	NSF drinking water certificate ANSI Standard 61	
WEICONLOCK® AN 302-42	Tested after IVK-recommendation by: Institute of hygiene in the Ruhr area	
WEICONLOCK® AN 302-43	Tested after IVK-recommendation by: Institute of hygiene in the Ruhr area	
WEICONLOCK® AN 302-44	Tested after IVK-recommendation by: Institute of hygiene in the Ruhr area	
WEICONLOCK® AN 302-60	Tested after IVK-recommendation by: Institute of hygiene in the Ruhr area	
WEICONLOCK® AN 302-70	Tested after IVK-recommendation by: Institute of hygiene in the Ruhr area	
WEICONLOCK® AN 302-72	Tested after IVK-recommendation by: Institute of hygiene in the Ruhr area	
WEICONLOCK® AN 302-80	Tested after IVK-recommendation by: Institute of hygiene in the Ruhr area	
WEICONLOCK® AN 306-10	Tested after IVK-recommendation by: Institute of hygiene in the Ruhr area	
WEICONLOCK® AN 306-20	Tested after IVK-recommendation by: Institute of hygiene in the Ruhr area   WRAS	 
WEICONLOCK® AN 306-30	Tested after IVK-recommendation by: Institute of hygiene in the Ruhr area	
WEICONLOCK® AN 306-38	Tested after IVK-recommendation by: Institute of hygiene in the Ruhr area	
WEICONLOCK® AN 306-48	Tested after IVK-recommendation by: Institute of hygiene in the Ruhr area	
WEICONLOCK® AN 305-72	Tested after IVK-recommendation by: Institute of hygiene in the Ruhr area	
WEICONLOCK® AN 305-77	Food area, classification code: S2, Registration No. 159910   Tested after IVK-recommendation by: Institute of hygiene in the Ruhr area   WRAS	  
WEICONLOCK® AN 305-78	Tested after IVK-recommendation by: Institute of hygiene in the Ruhr area	
WEICONLOCK® SI 303-31	Food area, classification code: S2, Registration No. 157190   Certificate of Conformity as an adhesive in food technology   drinking water certificate: Tested by the Ruhr Region Institute of Hygiene	 
Zinc Spray	Food area, classification code: R2, Registration No. 156012	
Zinc Spray bright grade	Food area, classification code: R2, Registration No. 156013	



## WEICON GmbH & Co. KG (Headquarters)

Königsberger Str. 255 · DE-48157 Münster  
P.O. Box 84 60 · DE-48045 Münster  
Germany  
phone +49 (0) 251 9322 0  
WhatsApp + 49 (0) 251 9322 393  
info@weicon.de

## WEICON Production GmbH

Vogelsrather Weg 25 · DE-41366 Schwalmthal  
Germany  
phone +49 (0) 2163 4998 079  
production@weicon.de

## WEICON Middle East L.L.C.

Jebel Ali Ind Area 1  
P.O. Box 118 216 · Dubai  
United Arab Emirates  
phone +971 4 880 25 05  
info@weicon.ae

## WEICON Inc.

20 Steckle Place · Unit 20  
Kitchener · Ontario N2E 2C3 · Canada  
phone +1 877 620 8889  
info@weicon.ca

## WEICON Kimya Sanayi Tic. Ltd. Şti.

Orhan Gazi Mahallesi 16. Yol Sokak No: 6  
34538 Hadimköy-Esenyurt · Istanbul  
Türkiye  
phone +90 (0) 212 465 33 65  
info@weicon.com.tr

## WEICON Romania SRL

Str. Podului Nr. 1  
547176 Budiu Mic (Targu Mures) · Romania  
phone +40 (0) 3 65 730 763  
office@weicon.com

## WEICON SA (Pty) Ltd

Unit No. D1 · Enterprise Village  
Capricorn Drive · Capricorn Park  
Muizenberg 7945 (Cape Town) · South Africa  
phone +27 (0) 21 709 0088  
info@weicon.co.za

## WEICON South East Asia Pte Ltd

7 Soon Lee Street  
#01-11 ISPACE · Singapore 627608  
Phone (+65) 6710 7671  
info@weicon.com.sg

## WEICON Czech Republic s.r.o.

Teplická 305  
CZ-417 61 Teplice-Bystřany  
Česká republika  
phone +42 (0) 417 533 013  
info@weicon.cz

## WEICON Ibérica S.L.

Av. de Somosierra 18, Nave 6  
San Sebastián de los Reyes  
28703 Madrid · Spain  
phone +34 (0) 914 7997 34  
info@weicon.es

## WEICON Italia S.r.L.

Via Gelasio Adamoli, 35  
16141 Genova · Italy  
phone +39 010 2924 871  
info@weicon.it

[www.weicon.com](http://www.weicon.com)



Management  
System  
ISO 9001:2015  
ISO 14001:2015

[www.tuv.com](http://www.tuv.com)  
ID 9108636595



WEICON Solutions for the  
**Food, Pharmaceutical  
and Cosmetic Industry**

Art.-No. 10017997

Distributed by:

The specifications and recommendations given in this brochure must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.